



GLASSWASHER X-35

To wash 30 baskets/hour. 350x350mm racks. Max. loading height: 220mm.



WARE WASHING
COMMERCIAL GLASSWASHERS



FEATURES AND BENEFITS

- ✓ Intuitive use.
- ✓ Catering grade stainless steel construction.
- ✓ Double skinned door equipped with magnetic micro-switch and high-efficiency seal, ensuring thermal and acoustic insulation.
- ✓ Completely rounded, stainless steel wire rack support and guide.
- ✓ Electronic control panel with anti-moisture seal.
- ✓ Highly efficient stainless steel dispersers ensure optimum water distribution for enhanced washing results.
- ✓ Rinsing dispersers offer clean design. Assembly without screws.
- ✓ Double filter system provides effective wash pump protection.
- ✓ Independent rinse boiler complete with adjustable thermostat and thermal lock option.
- ✓ Easily removable dispersers and filters for cleaning and maintenance. No tools needed.
- ✓ Designed for quick and easy maintenance. Fast access to components for on-site maintenance.
- ✓ 100% tested.

SALES DESCRIPTION

3 wash cycles. Final cold rinse facility. Option of built-in water softener.

- ✓ **GUARANTEED DISINFECTION** in compliance with DIN 10534 Norm.
- ✓ **THERMAL LOCK** function: Sanitization guarantee. Ensures that the rinsing will be carried out only when the ideal temperature for disinfecting the dishes has been reached.
- ✓ Best performance.
- ✓ Optimal washing results.
- ✓ Sturdy and reliable.
- ✓ Stainless Steel, sturdy and resistant was-

INCLUDES

- ✓ Rinse aid pump.
- ✓ 1 mixed basket.
- ✓ 1 open basket.
- ✓ 1 small cutlery basket.

ACCESSORIES

- ☐ Stands for glass- and dishwashers
- ☐ Dosing equipments
- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ 350X350 mm. baskets
- ☐ Inserts, supplements & similar
- ☐ High Feet Kit
- ☐ Reverse Osmosis device OS-140P



sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet
updated 25/06/2020



GLASSWASHER X-35

To wash 30 baskets/hour. 350x350mm racks. Max. loading height: 220mm.



SPECIFICATIONS

Basket dimensions: 350 mm x 350 mm

Maximum glass height: 220 mm

Cycle duration: 90 " / 120 " / 150 "

Production baskets/hour: 40 / 30 / 24

Boiler capacity: 4.5 l

Wash tank capacity: 12.7 l

Water consumption/cycle: 2.2 l

Loading

✓ Pump: 75 W / 0.1 Hp

✓ Tank: 1500 W

✓ Boiler: 2800 W

✓ Total loading: 2875 W

External dimensions (WxDxH)


✓ Width: 420 mm

✓ Depth: 495 mm

✓ Height: 645 mm

Net weight: 33 Kg

Noise level (1m.): <70 dB(A)

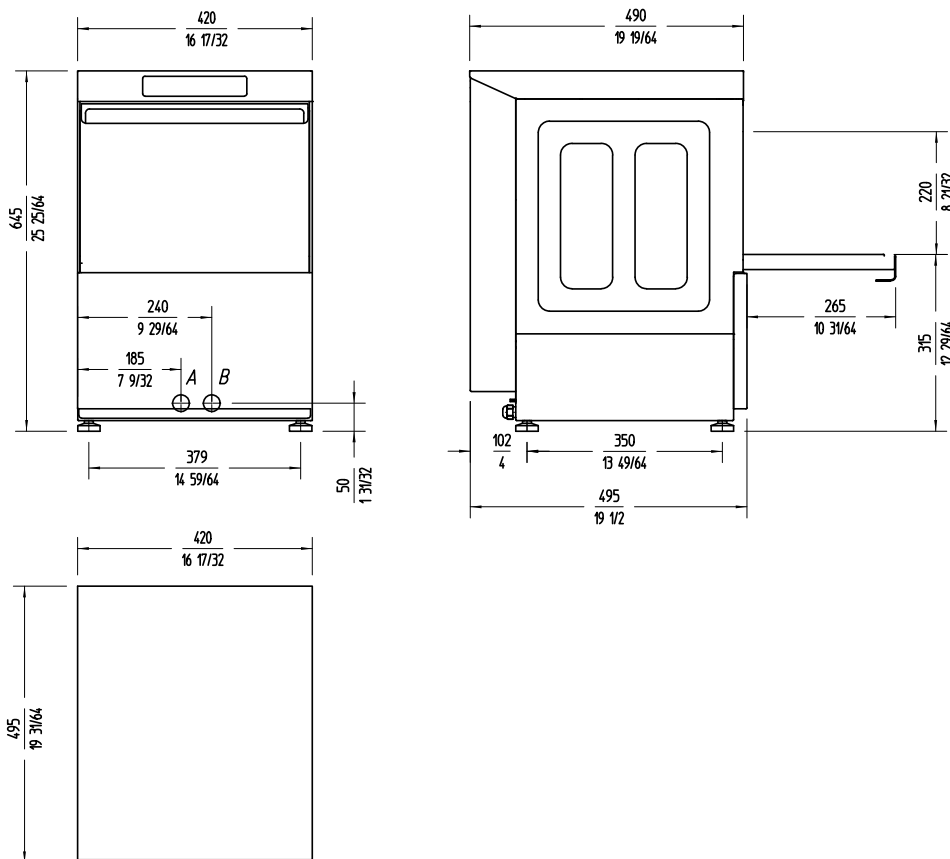

AVAILABLE MODELS

1301960	Glasswasher X-35 230/50/1
1301961	Glasswasher X-35 220/60/1
1301962	Glasswasher X-35 230/50/1 DD
1301963	Glasswasher X-35 220/60/1 DD
1301964	Glasswasher X-35D 230/50/1 (built-in water softener)
1301965	Glasswasher X-35D 220/60/1 (built-in water softener)
1301966	Glasswasher X-35D 230/50/1 DD (built-in water softener)
1301967	Glasswasher X-35D 220/60/1 DD (built-in water softener)

* Ask for special versions availability

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project

Date

Item

Qty

Approved

WARE WASHING
COMMERCIAL GLASSWASHERS

product sheet
updated 25/06/2020