



DISHWASHER P-50

500x500mm. racks. Max. loading height: 330mm.



WARE WASHING
COMMERCIAL DISHWASHERS



FEATURES AND BENEFITS

- ✓ Intuitive use.
- ✓ Top and bottom wash arms.
- ✓ Catering grade stainless steel construction (AISI 304 2B).
- ✓ Double skinned door with high efficiency seal, ensuring thermal and acoustic insulation. Magnetic door micro-switch.
- ✓ Rounded finish interior ensures no accumulation of dirt.
- ✓ Electromechanic, watertight control panel.
- ✓ 1 wash cycle.
- ✓ Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses.
- ✓ Easy to assemble, boltless rinse spray arms and filters.
- ✓ Designed for easy and fast on-site maintenance.
- ✓ 100% tested.

SALES DESCRIPTION

Professional Washing with Total Guarantee.

- ✓ GUARANTEED DISINFECTION in compliance with DIN 10534 Norm.
- ✓ User-friendly.
- ✓ Optimal washing results.
- ✓ Sturdy and reliable.
- ✓ Stainless steel, sturdy and resistant washing arms. Don't get damaged because of chemical corrosion.
- ✓ 2.5 kW tank element: optimal recovery time.

INCLUDES

- ✓ Rinse aid pump.
- ✓ 1 plate basket.
- ✓ 1 open basket.
- ✓ 1 small cutlery basket.

ACCESSORIES

- ☐ Stands for glass- and dishwashers
- ☐ Filters for dishwashers
- ☐ Dosing equipments
- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ Sink units: worktops
- ☐ Frames for dishwashers
- ☐ 500 x 500 mm. baskets
- ☐ Inserts, supplements & similar
- ☐ High Feet Kit
- ☐ Reverse Osmosis device OS-140P



sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet
updated 06/05/2020



DISHWASHER P-50

500x500mm. racks. Max. loading height: 330mm.



SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Maximum glass height: 330 mm

Cycle duration: 180 "

Production baskets/hour: 20

Wash temperature: 0 °C - 65 °C

Rinse temperature: 0 °C - 90 °C

✓ Boiler capacity: 4.5 l

✓ Wash tank capacity: 26 l

✓ Water consumption/cycle: 3 l

✓ Loading

✓

✓ Pump: 370 W / 0.5 Hp

✓ Tank: 2500 W

✓ Boiler: 2800 W

✓ Total loading: 3170 W

External dimensions (WxDxH)


✓ Width: 600 mm

✓ Depth: 630 mm

✓ Height: 835 mm

Net weight: 63 Kg

Noise level (1m.): <70 dB(A)

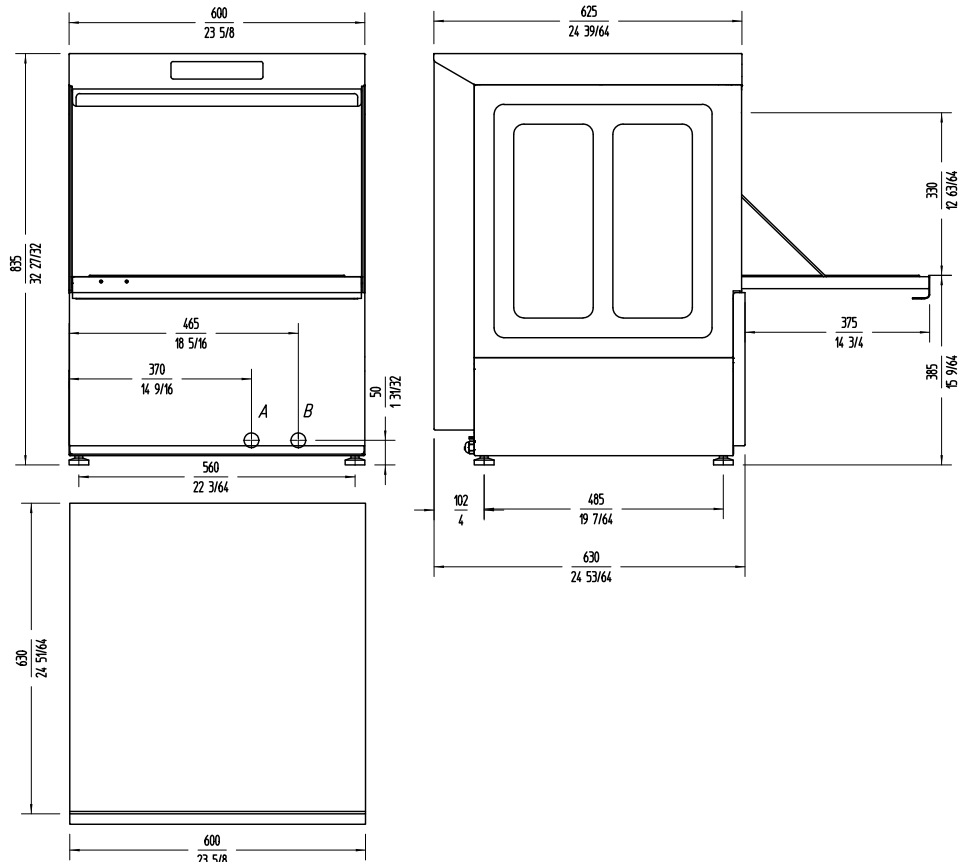

AVAILABLE MODELS

1302080	Dishwasher P-50 230/50/1
1302081	Dishwasher P-50 220/60/1
1302085	Dishwasher P-50B 230/50/1 (with drain pump)
1302084	Dishwasher P-50B 220/60/1 (with drain pump)
1302092	Dishwasher P-51 230/50/1
1302088	Dishwasher P-50 110/60/1
1302083	Dishwasher P-50B 230/50/1 DD (with drain pump)
1302082	Dishwasher P-50 230/50/1 DD

* Ask for special versions availability

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36
20720 Azkoitia, Spain sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet

updated 06/05/2020

WARE WASHING
COMMERCIAL DISHWASHERS