



DISHWASHER X-45

Compact dishwasher. 450x450mm. racks. Max. loading height: 280mm.



WARE WASHING
COMMERCIAL DISHWASHERS



FEATURES AND BENEFITS

- ✓ Intuitive use.
- ✓ Top and bottom wash arms.
- ✓ Catering grade stainless steel construction (AISI 304 2B).
- ✓ Double skinned door equipped with magnetic micro-switch and high-efficiency seal, ensuring thermal and acoustic insulation.
- ✓ Rounded finish interior ensures no accumulation of dirt.
- ✓ Completely rounded, stainless steel wire rack support and guide.
- ✓ Electronic control panel with anti-moisture seal.
- ✓ Highly efficient stainless steel dispersers ensure optimum water distribution for enhanced washing performance.
- ✓ Rinsing dispersers offer clean design. Assembly without screws.
- ✓ Double filter system provides effective wash pump protection.
- ✓ Independent rinse boiler complete with adjustable and safety thermostats and thermal lock option.
- ✓ Tank equipped with adjustable thermostat.
- ✓ Easily removable dispersers and filters for cleaning and maintenance. No tools needed.
- ✓ Designed for quick and easy maintenance. Fast access to components for on-site maintenance.
- ✓ 100% tested.

SALES DESCRIPTION

Commercial dishwasher with 3 wash cycles and thermal cycle delay option included.

- ✓ **GUARANTEED DISINFECTION** in compliance with DIN 10534 Norm.
- ✓ **THERMAL LOCK** function: Sanitization guarantee. Ensures that the rinsing will be carried out only when the ideal temperature for disinfecting the dishes has been reached.

INCLUDES

- ✓ Rinse aid pump.
- ✓ 1 plate basket.
- ✓ 1 open basket.
- ✓ 1 small cutlery basket.

ACCESSORIES

- ☐ Stands for glass- and dishwashers
- ☐ Dosing equipments
- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ 450 x 450 mm. baskets
- ☐ Inserts, supplements & similar
- ☐ High Feet Kit
- ☐ Reverse Osmosis device OS-140P



sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet
updated 11/05/2020



DISHWASHER X-45

Compact dishwasher. 450x450mm. racks. Max. loading height: 280mm.



WARE WASHING
COMMERCIAL DISHWASHERS

SPECIFICATIONS

Basket dimensions: 450 mm x 450 mm

Maximum glass height: 280 mm

Cycle duration: 90 " / 120 " / 150 "

Production baskets/hour: 40 / 30 / 24

Wash temperature: 50 °C - 65 °C

Rinse temperature: 75 °C - 85 °C

✓ Boiler capacity: 6.5 l

✓ Wash tank capacity: 23 l

✓ Water consumption/cycle: 2.9 l

✓ **Loading**

✓

✓ Pump: 370 W / 0.5 Hp

✓ Tank: 1500 W

✓ Boiler: 2800 W

✓ Total loading: 3170 W

External dimensions (WxDxH)

✓ Width: 520 mm

✓ Depth: 590 mm


✓ Height: 795 mm

Net weight: 54 Kg

Noise level (1m.): <70 dB(A)

Crated dimensions

565 x 645 x 915 mm

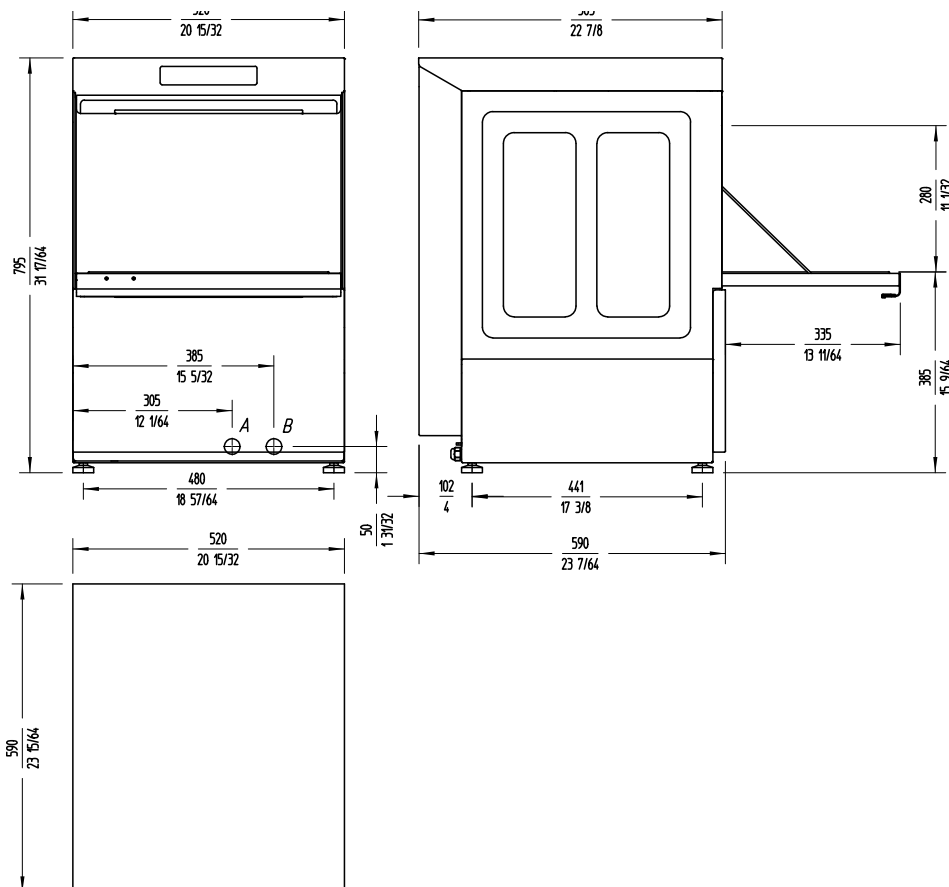

AVAILABLE MODELS

1302060	Dishwasher X-45 230/50/1
1302061	Dishwasher X-45 220/60/1
1302062	Dishwasher X-45 230/50/1 DD
1302063	Dishwasher X-45 220/60/1 DD
1302064	Dishwasher X-45B 230/50/1 (with drain pump)
1302065	Dishwasher X-45B 220/60/1 (with drain pump)
1302066	Dishwasher X-45B 230/50/1 DD (with drain pump)
1302067	Dishwasher X-45B 220/60/1 DD (with drain pump)

* Ask for special versions availability

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet
updated 11/05/2020