



VACUUM SEALER SU-316

Tabletop model. 16 m³/h. 320 mm.



FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE



SALES DESCRIPTION

320 mm. sealing bar.
16 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

FEATURES AND BENEFITS

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber. Deep-drawn chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

ACCESSORIES

- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kits
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB Desktop printer for SU vacuum packing machines *
- ☐ Thermal transfer labels for RB printer



sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet
updated 30/04/2020



VACUUM SEALER SU-316

Tabletop model. 16 m³/h. 320 mm.



SPECIFICATIONS

Pump capacity: 16 m³/h

Pump capacity (60 Hz): 19 m³/h

Bar length: 320 mm

Total loading: -- W

Vacuum pressure (maximum): 2 mbar

Internal dimensions

✓ Width: 330 mm

✓ Depth: 360 mm

✓ Height: 155 mm

External dimensions (WxDxH)

✓ Width: 384 mm




✓ Depth: 465 mm

✓ Height: 403 mm

Net weight: 42 Kg

Noise level (1m.): 75 dB(A)

Background noise: 32 dB(A)

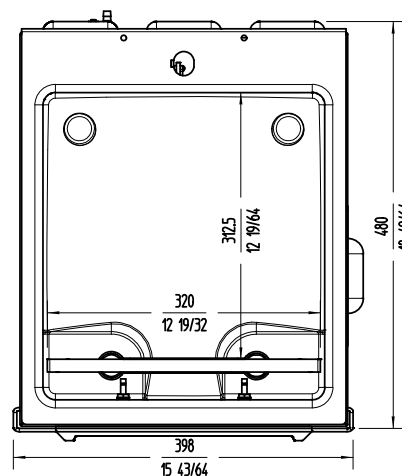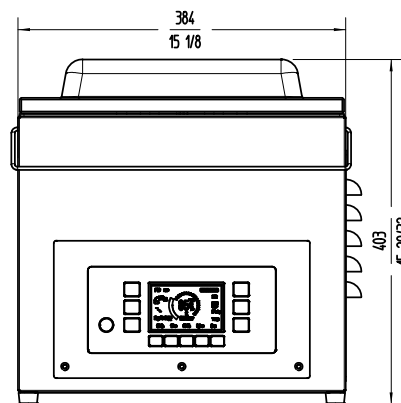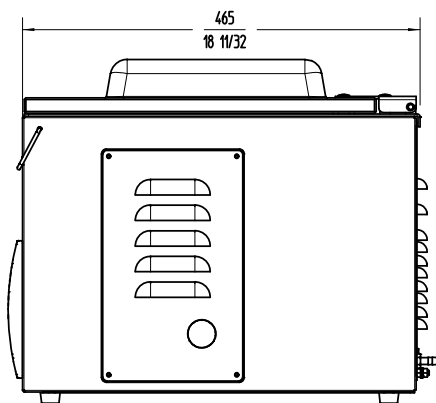

AVAILABLE MODELS

1140742	Vacuum packing machine SU-316 230/50-60/1
1140743	Vacuum packing machine SU-316G 230/50-60/1
1140744	Vacuum packing machine SU-316P 230/50-60/1
1140745	Vacuum packing machine SU-316+ 230/50-60/1
1140746	Vacuum packing machine SU-316P+ 230/50-60/1
1140747	Vacuum packing machine SU-316GP 230/50-60/1
1140748	Vacuum packing machine SU-316G+ 230/50-60/1
1140749	Vacuum packing machine SU-316GP+ 230/50-60/1
1140751	Vacuum packing machine SU-316 120/50-60/1
1140752	Vacuum packing machine SU-316G 120/50-60/1
1140753	Vacuum packing machine SU-316P 120/50-60/1
1140754	Vacuum packing machine SU-316+ 120/50-60/1
1140755	Vacuum packing machine SU-316P+ 120/50-60/1 (with PLUS welding option)
1140756	Vacuum packing machine SU-316GP 120/50-60/1
1140757	Vacuum packing machine SU-316G+ 120/50-60/1
1140758	Vacuum packing machine SU-316GP+ 120/50-60/1

* Ask for special versions availability

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet

updated 30/04/2020

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE