



DISHWASHER X-80

500x500mm racks. Max. loading height: 400mm.



WARE WASHING
COMMERCIAL DISHWASHERS



FEATURES AND BENEFITS

- ✓ Commercial dishwasher with tall base and a max. loading height of 400mm. to facilitate the washing of trays.
- ✓ With easy-to-use electronic panel complete with wash and rinse temperature display.
- ✓ Complete with stainless steel top-of-tank filters.
- ✓ Intuitive use.
- ✓ Top and bottom wash arms.
- ✓ Highly efficient, 1HP wash pump.
- ✓ Catering grade stainless steel construction (AISI 304 2B).
- ✓ Double skinned door equipped with magnetic micro-switch and high-efficiency seal, ensuring thermal and acoustic insulation.
- ✓ Rounded finish interior ensures no accumulation of dirt.
- ✓ Completely rounded, stainless steel wire rack support and guide.
- ✓ Electronic, watertight control panel with wash and rinse temperature display.
- ✓ 3 wash cycles.
- ✓ Highly efficient stainless steel dispersers ensure optimum water distribution for enhanced washing performance.
- ✓ Rinsing dispersers offer clean design. Assembly without screws.
- ✓ Double filter system provides effective wash pump protection.
- ✓ Easily removable dispersers and filters for cleaning and maintenance. No tools needed.
- ✓ Independent rinse boiler complete with adjustable and safety thermostats.
- ✓ Tank equipped with adjustable thermostat.
- ✓ Thermal cycle delay option included.
- ✓ Designed for quick and easy maintenance. Fast access to components for on-site maintenance.
- ✓ 100% tested.

SALES DESCRIPTION

Commercial dishwasher with tall base that allows more comfortable operation.

- ✓ **GUARANTEED DISINFECTION** in compliance with DIN 10534 Norm.
- ✓ **THERMAL LOCK** function: Sanitization guarantee. Ensures that the rinsing will be carried out only when the ideal temperature for disinfecting the dishes has been reached.
- ✓ **TEMPERATURE DISPLAY** to visually check this critical operating parameter. Useful for

INCLUDES

- ✓ Rinse aid pump.
- ✓ Stainless steel top-of-tank filter set.
- ✓ 1 open basket.
- ✓ 1 plate basket.
- ✓ 1 small cutlery basket.

ACCESSORIES

- ☐ Filters for dishwashers
- ☐ Dosing equipments
- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ 500 x 500 mm. baskets
- ☐ Inserts, supplements & similar
- ☐ High Feet Kit
- ☐ Reverse Osmosis device OS-140P



sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36
20720 Azkoitia, Spain sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet
updated 25/06/2020



DISHWASHER X-80

500x500mm racks. Max. loading height: 400mm.



SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Maximum glass height: 400 mm

Cycle duration: 120 " / 150 " / 210 "

Production baskets/hour: 30 / 24 / 17

Wash temperature: 0 °C - 65 °C

Rinse temperature: 0 °C - 90 °C

✓ Boiler capacity: 10 l

✓ Wash tank capacity: 26 l

✓ Water consumption/cycle: 2.9 l

✓ Loading

✓

✓ Pump: 730 W / 1 Hp

✓ Tank: 2500 W

✓ Boiler: 6000 W

✓ Total loading: 6730 W

External dimensions (WxDxH)



✓ Width: 600 mm

✓ Depth: 630 mm

✓ Height: 1320 mm

Net weight: 78 Kg

Noise level (1m.): <70 dB(A)

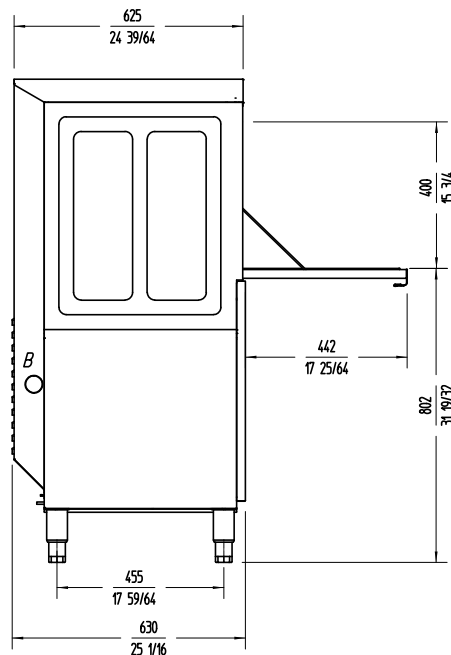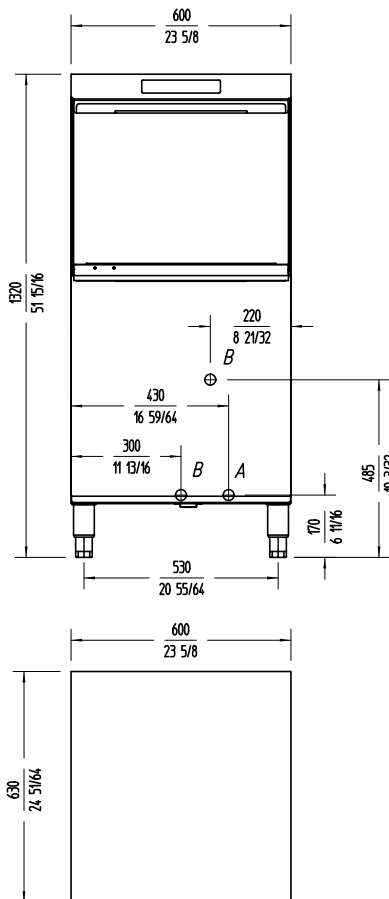

AVAILABLE MODELS

1302180 Dishwasher X-80 400/50/3N

1302181 Dishwasher X-80 400/50/3N DD

1302182 Dishwasher X-80 220/60/3

1302183 Dishwasher X-80 230/50/1 DD

1302184 Dishwasher X-80B 230/50/1 DD (with drain pump)

1302189 Dishwasher X-80B 400/50/3N (with drain pump)

* Ask for special versions availability

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project

Date

Item

Qty

Approved

product sheet

updated 25/06/2020

WARE WASHING
COMMERCIAL DISHWASHERS